


Dynamometer / Digital Load Indicator



Nøjagtighed +/- 0,8% af max kapacitet
 Med LCD display -10 grader til +40 grader C (5 cifre, 18mm høje)
 Arbejdstemperatur -10 grader til +40 grader C
 Vejrbestandig og støvtæt i henhold til EN 60 529: IP 65
 Hus i lakeret aluminium alloy
 Strømforsyning: AA Batterier

Accuracy +/- 0,8% of max capacity
 With LCD display, -10 to +40 degree C
 Weather and dust proof relating to EN 60 529: IP 65
 Housing in painted aluminium alloy
 Powersupply: AA Batteries

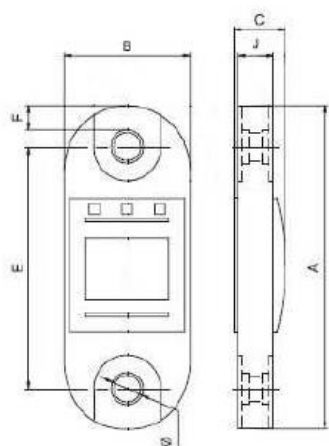

Art No.	Capacity tons	Index accuracy kg	A mm	B mm	C mm	E mm	F mm	J mm	Ø mm	Weight Kg
KVD002	0,25	0,5	220	89,9	41,9	195,8	11,9	26,9	14,0	1,1
KVD005	0,50	0,9	220	89,9	41,9	195,8	11,9	26,9	14,0	1,1
KVD010	1,00	0,9	220	89,9	41,9	195,8	11,9	26,9	14,0	1,1
KVD020	2,00	4,5	233	89,9	48,0	207,0	12,7	33,0	21,8	1,3
KVD032	3,20	4,5	234	96,8	48,0	207,0	18,0	33,0	21,8	1,5
KVD064	6,40	9,0	274	114,8	48,0	216,9	29,0	33,0	27,9	2,3