



# XLstep P - 40102


## Product description

- Handy and robust work platform in a new design.
- Platform size approx. 400 x 300 mm.
- Extra-deep treads (92 mm) for comfortable and safe standing.
- Optimum stability thanks to rigid locking bar on both sides.
- Double-sided access.
- Abrasion-resistant, anodised stiles.
- New design - high-quality 2-component plastic ladder shoe - also suitable for working on gratings.



## Hints and special features

Complies with EN 14 183

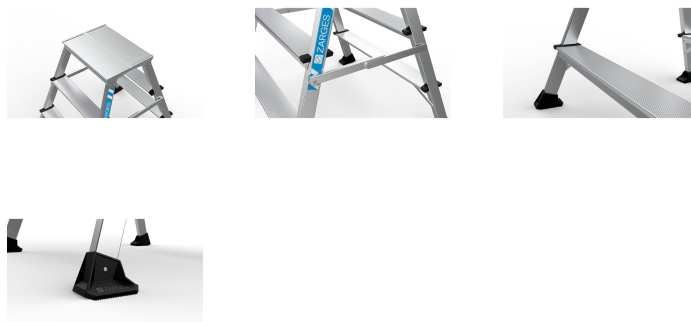

## Product features

Base <b>0,82 m x 0,68 m</b>	Coating <b>anodised</b>	Connection Stile-Rung <b>riveted</b>	Load capacity <b>150 kg</b>	Material <b>Anodised aluminium</b>
Number of treads <b>3</b>	Number of treads <b>2 x 3</b>	Overall base width <b>0.68 m</b>	Pitch rung/tread <b>250 mm</b>	Platform height <b>0.74 m</b>
Platform length <b>300 mm</b>	Platform width <b>400 mm</b>	Standards <b>EN 14183</b>	Stile depth <b>48 mm</b>	Transport dimensions <b>approx. 840 mm x approx. 680 mm x approx. 290 mm</b>
Tread depth	Type rung/tread	Warranty	Weight	Working height



**92 mm**

**serrated**

**10 years**

**6.1 kg**

**2.74 m**