

Technical data

UKP213HCC


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK213G2H, SCC213, SCO213-60, P213N

VISUAL (S)

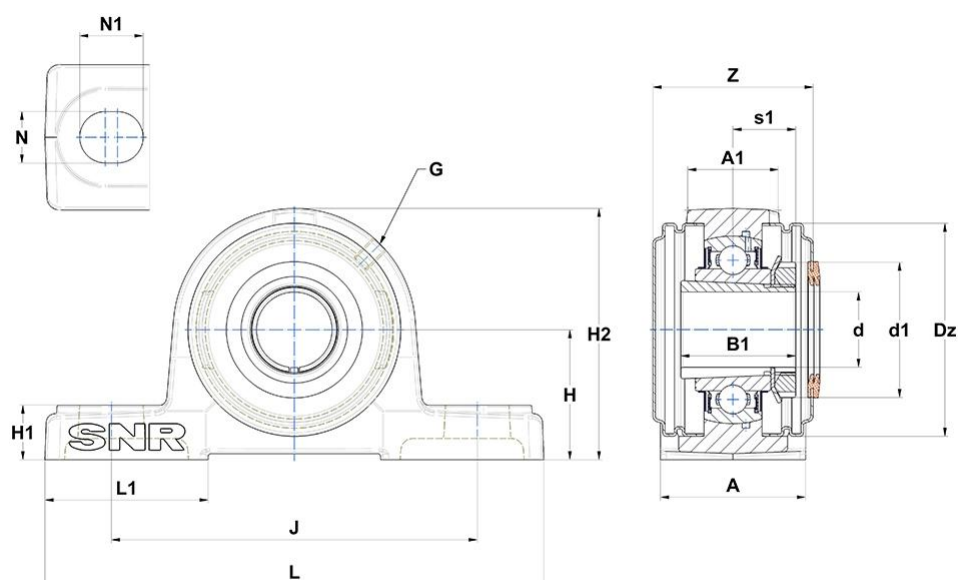

PRODUCT DEFINITION

A - Housing width	70 mm
A1 - Housing top width	46 mm
B - Width of Inner Ring	36 mm
d - Shaft diameter	60 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	85 mm
Dz - Outer diameter of cover	132 mm

PRODUCT DEFINITION

G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	76,2 mm
H1 - Housing foot height	27 mm
H2 - Housing height	150 mm
J - Mounting holes distance	203 mm
L - Housing length	265 mm
L1 - Housing foot length	77 mm
N - Mounting hole dimension	25 mm
N1 - Mounting hole length	29 mm
Z - Width over covers	90,8 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	57,2 kN
C0 - Static load rating	40 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	6,235 kg
Adapter sleeve reference	H2313