



Image may differ from product. See technical specification for details.

HK 0810 RS

Drawn cup needle roller bearing with open ends and integral sealing

Drawn cup needle roller bearings are typically used in applications where the housing bore cannot be used as a raceway for a needle roller and cage assembly, but where a very compact and economical bearing arrangement is required. Owing to their large number of rollers, the bearings have a high load carrying capacity and stiffness. The integral sealing can significantly prolong bearing service life because it keeps lubricant in the bearings and contaminants out. Sealed bearings are delivered with an initial grease fill.

- High radial load carrying capacity
- High stiffness
- Very low cross-sectional height
- Sealed for increased reliability

Oversight

Dimensions

Bore diameter of needle roller complement	8 mm
Outside diameter	12 mm
Width	10 mm

Performance

Basic dynamic load rating	2.7 kN
Basic static load rating	2.75 kN
Limiting speed	13 000 r/min


Properties

Bearing part	Bearing without inner ring
Number of rows	1
Outer ring type	Drawn cup with open ends
Aligning feature	Without
Cage	Sheet steel
Number of flanges, outer ring	2
Tolerance class	Normal
Material, bearing	Bearing steel
Coating	Without
Sealing	Seal on one side
Sealing type	Contact
Lubricant	Grease
Relubrication feature	Without
Indicative carbon footprint for new product	0.0126 kg CO ₂ e

Logistics

Product net weight	0.0035 kg
eClass code	23-05-09-03
UNSPSC code	31171512

Teknisk specifikation

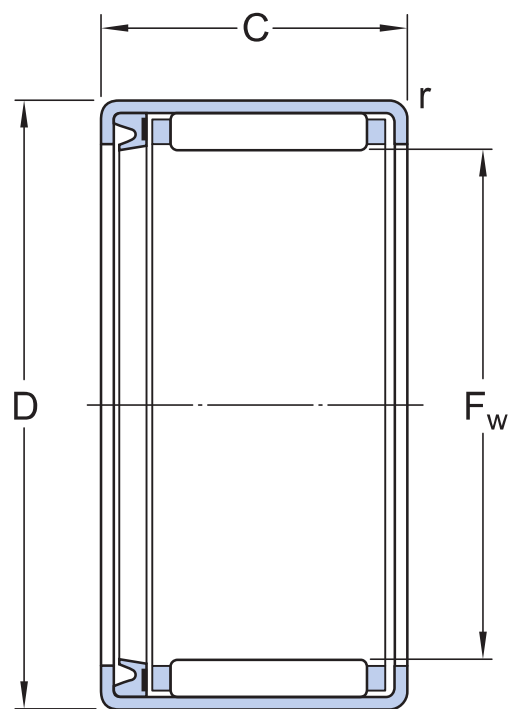

Dimensions

F _w	8 mm	Diameter under rollers
D	12 mm	Outside diameter
C	10 mm	Width
r	min. 0.4 mm	Chamfer dimension drawn cup (outer ring)

Calculation data

Basic dynamic load rating	C	2.7 kN
Basic static load rating	C ₀	2.75 kN
Fatigue load limit	P _u	0.285 kN
Limiting speed		13 000 r/min

Tolerancer og frigange