



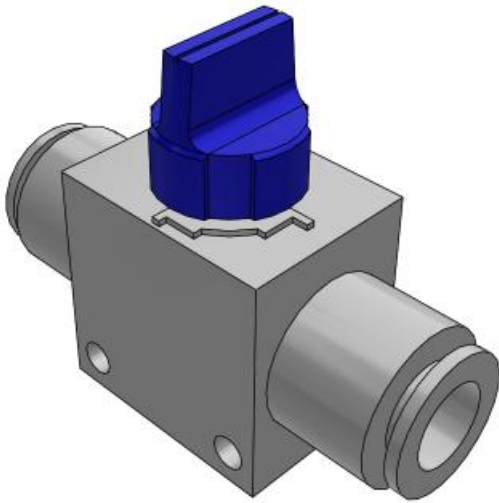

VHK*, Finger Valve VHK3-10F-10F

Datablad

Finger valve series VHK has a large effective area of 2.0 to 17.5mm². This series begins with a minimum tube O.D of $\varnothing 4$. The valve direction clearly indicates whether the valve is open or closed (shut to open is counter- clockwise). Classification of knob by color difference facilitates distinction between 2 port valves (gray) and 3 port valves (blue). The optional flame resistant model's knob, whether using the 2 or 3 port valve, is red.




return with manual control lever

Standardspecifikationer

Size	3 (3 Port Valve)
Model	10F-10F (P Side Port Size Ø 10 mm - A Side Port Size Ø 10 mm)
Knob Color	2 Port Valve: Gray/3 Port Valve: Blue
w/Exception of P Port 11F and A Port 11F/36S Valve Gray	
Bracket	None
Trykmedie	Compressed Air
Trykmediet maksimumtemperatur	60 °C
Trykmediets minimumstemperatur	0 °C
Maximal operating pressure	1.0 MPa
Driftstryk for max. vakuum	- 0.1 MPa
Proof pressure	1.5 MPa
Maksimal omgivelsestemperatur	60 °C
Mindste omgivelsestemperatur	0 °C
Antal pneumatiske forbindelser	2 pcs.
Pneumatic input connection	Ø 10 mm
Pneumatic output connection	Ø 10 mm
Funktion af logikventil	OR
Aktiveringstype	Manually
Forseglingsprincip	Soft seal
Flow rate	878 NI/min
Brugbart rørmateriale	Nylon
Weight	0.029 Kg

Dimensioner

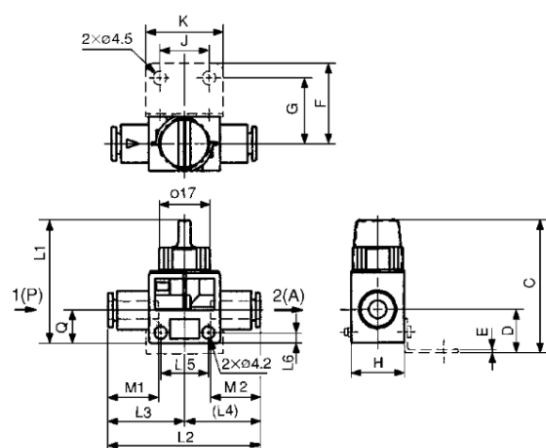

Konstruktion

CONSTRUCTION IMAGE NOT LOADED ON THE FOLDER

Yderligere oplysninger

Katalog

[VHK_EU.pdf](#)