


Kedjetransmissioner

Kedjehjul

Standard


05B 8 MM



05B 8 MM. Max. axelhål = Dn x 0,6 med kilspår SMS 2305.

Simplex B = 2,8						
Z	Fig.	DØ	Dn	L	Dp	Best nr
8	1	6	13	12	20,90	0712
9	1	6	15	12	23,39	-0109
10	1	8	17	12	25,89	-0208
11	1	8	18	13	28,39	-0307
12	1	8	20	13	30,31	-0406
13	1	8	23	13	33,42	-0505
14	1	8	25	13	35,95	-0604
15	1	8	28	13	38,48	-0703
16	1	8	30	14	41,01	-0802
17	1	8	30	14	43,53	-0901
18	1	8	30	14	46,07	-1008
19	1	8	30	14	48,61	-1107
20	1	8	30	14	51,14	-1206
21	1	8	35	14	53,68	-1305
22	1	8	35	14	56,21	-1404
23	1	8	35	14	58,75	-1503
24	1	8	35	14	61,29	-1602
25	1	8	35	14	63,83	-1701
26	1	10	40	16	66,37	-1800
27	1	10	40	16	68,91	-1909
28	1	10	40	16	71,45	-2006
29	1	10	40	16	73,99	-2105
30	1	10	40	16	76,53	-2204
31	1	10	40	16	79,08	-2303
32	1	10	40	16	81,61	-2402
33	1	10	40	16	84,16	-2501
34	1	10	40	16	86,70	-2600
35	1	10	40	16	89,25	-2709
36	1	10	40	16	91,79	-2808
37	1	10	40	16	94,33	-2907
38	1	10	40	16	96,88	-3004
39	1	10	40	16	99,42	-3103
40	1	10	40	16	101,97	-3202
45	1	12	60	20	114,69	-3301
50	1	12	60	20	127,41	-3400
57	1	14	80	20	145,22	-3509
76	1	20	80	25	193,59	-3608
						-3707

Kedjehjul Standard 06B 3/8"

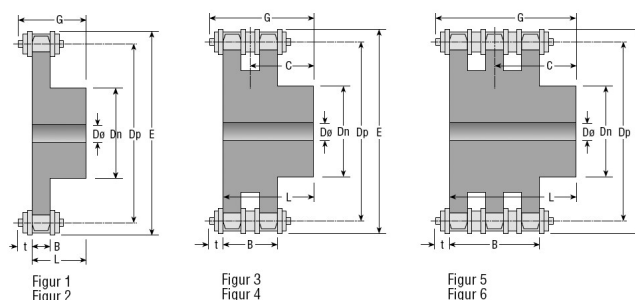

06B 3/8 ". Max. axelhål = Dn x 0,6 med kilspår SMS 2305.


Simplex B = 5,3							Simplex B = 5,3							Simplex B = 5,3						
Z	Fig.	DØ	Dn	L	C	Best nr 0713	Z	Fig.	DØ	Dn	L	C	Best nr 0713	Z	Fig.	DØ	Dn	L	C	Best nr 0713
8	1	6	15	22	19,35	-0108	24	1	12	54	28	25,35	-1221	40	1	16	70	30	27,35	-2344
9	1	8	18	22	19,35	-0173	25	1	12	57	28	25,35	-1296	42	2	16	80	32,9	29,35	-2419
10	1	8	20	22	19,35	-0249	26	1	12	60	28	25,35	-1361	45	2	16	80	32,9	29,35	-2484
11	1	8	22	25	22,35	-0314	27	1	12	60	28	25,35	-1437	46	2	16	80	32,9	29,35	-2559
12	1	8	25	25	22,35	-0389	28	1	12	60	28	25,35	-1502	48	2	16	80	32,9	29,35	-2625
13	1	10	28	25	22,35	-0454	29	1	12	60	28	25,35	-1577	50	2	16	80	32,9	29,35	-2690
14	1	10	31	25	22,35	-0520	30	1	12	60	28	25,35	-1643	54	2	16	80	32,9	29,35	-2765
15	1	10	34	25	22,35	-0595	31	1	12	65	30	27,35	-1718	57	2	16	80	32,9	29,35	-2831
16	1	10	37	28	25,35	-0660	32	1	12	65	30	27,35	-1783	60	2	16	80	32,9	29,35	-2906
17	1	10	40	28	25,35	-0736	33	1	14	65	30	27,35	-1858	65	2	20	80	32,9	29,35	-2971
18	1	10	43	28	25,35	-0801	34	1	14	65	30	27,35	-1924	70	2	20	80	32,9	29,35	-3045
19	1	10	45	28	25,35	-0876	35	1	14	65	30	27,35	-1999	76	2	20	80	32,9	29,35	-3110
20	1	10	46	28	25,35	-0942	36	1	14	70	30	27,35	-2062	80	2	20	80	32,9	29,35	-3185
21	1	10	48	28	25,35	-1015	37	1	14	70	30	27,35	-2138	95	2	20	80	32,9	29,35	-3250
22	1	10	50	28	25,35	-1080	38	1	16	70	30	27,35	-2203	114	2	20	80	32,9	29,35	-3326
23	1	12	52	28	25,35	-1155	39	1	16	70	30	27,35	-2278							

Duplex B = 15,4							Duplex B = 15,4							Duplex B = 15,4						
Z	Fig.	DØ	Dn	L	C	Best nr 0713	Z	Fig.	DØ	Dn	L	C	Best nr 0713	Z	Fig.	DØ	Dn	L	C	Best nr 0713
8	3	6	15	22	14,3	-3391	24	3	12	61	30	22,3	-4514	40	3	16	90	30	22,3	-5636
9	3	8	18	22	14,3	-3466	25	3	12	64	30	22,3	-4589	42	4	16	90	30	32,3	-5701
10	3	8	20	22	14,3	-3532	26	3	12	67	30	22,3	-4654	45	4	16	90	30	32,3	-5776
11	3	10	22	25	17,3	-3607	27	3	12	70	30	22,3	-4720	46	4	16	90	40	32,3	-5842
12	3	10	25	25	17,3	-3672	28	3	12	73	30	22,3	-4795	48	4	16	90	40	32,3	-5917
13	3	10	28	25	17,3	-3748	29	3	12	76	30	22,3	-4860	50	4	16	90	40	32,3	-5982
14	3	10	31	25	17,3	-3813	30	3	12	79	30	22,3	-4936	54	4	16	90	40	32,3	-6055
15	3	10	34	25	17,3	-3888	31	3	16	80	30	22,3	-5008	57	4	16	90	40	32,3	-6121
16	3	12	37	30	22,3	-3953	32	3	16	80	30	22,3	-5073	60	4	16	90	40	32,3	-6196
17	3	12	40	30	22,3	-4027	33	3	16	80	30	22,3	-5149	65	4	20	90	40	32,3	-6261
18	3	12	43	30	22,3	-4092	34	3	16	80	30	22,3	-5214	70	4	20	90	40	32,3	-6337
19	3	12	46	30	22,3	-4167	35	3	16	80	30	22,3	-5289	76	4	20	90	40	32,3	-6402
20	3	12	49	30	22,3	-4233	36	3	16	90	30	22,3	-5354	80	4	20	90	40	32,3	-6477
21	3	12	52	30	22,3	-4308	37	3	16	90	30	22,3	-5420	95	4	20	90	40	32,3	-6543
22	3	12	55	30	22,3	-4373	38	3	16	90	30	22,3	-5495	114	4	20	90	40	32,3	-6618
23	3	12	58	30	22,3	-4449	39	3	16	90	30	22,3	-5560							

Triplex B = 25,6										Triplex B = 25,6									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0713	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0713
8	5	6	15	32	19,2	24,89	35	8	-6683	32	5	16	80	40	27,2	97,17	106	8	-8366
9	5	8	18	32	19,2	27,85	37	8	-6758	33	5	16	80	40	27,2	100,20	109	8	-8432
10	5	10	20	32	19,2	30,82	40	8	-6824	34	5	16	85	40	27,2	103,23	112	8	-8507
11	5	10	22	35	22,2	33,80	43	8	-6899	35	5	16	85	40	27,2	106,26	115	8	-8572
12	5	10	25	35	22,2	36,80	46	8	-6964	36	5	16	90	40	27,2	109,29	118	8	-8648
13	5	10	28	35	22,2	39,79	49	8	-7038	37	5	16	90	40	27,2	112,32	121	8	-8713
14	5	12	31	35	22,2	42,80	52	8	-7103	38	5	16	90	40	27,2	115,35	124	8	-8788
15	5	12	34	35	22,2	45,81	55	8	-7178	39	5	16	90	40	27,2	118,37	127	8	-8853
16	5	12	37	35	22,2	48,82	58	8	-7244	40	5	16	90	40	27,2	121,40	130	8	-8929
17	5	12	40	35	22,2	51,83	61	8	-7319	42	6	16	90	56	43,2	127,46	136	8	-8994
18	5	12	43	35	22,2	54,85	64	8	-7384	45	6	16	90	56	43,2	136,55	145	8	-9067
19	5	12	46	35	22,2	57,87	67	8	-7459	46	6	16	90	56	43,2	139,58	148	8	-9133
20	5	12	49	35	22,2	60,89	70	8	-7525	48	6	16	90	56	43,2	145,64	154	8	-9208
21	5	14	52	40	27,2	63,91	73	8	-7590	50	6	16	90	56	43,2	151,69	160	8	-9273
22	5	14	55	40	27,2	66,93	76	8	-7665	54	6	20	90	56	43,2	163,82	172	8	-9349
23	5	14	58	40	27,2	69,95	79	8	-7731	57	6	20	90	56	43,2	172,91	182	8	-9414
24	5	14	61	40	27,2	72,97	82	8	-7806	60	6	20	90	56	43,2	181,99	191	8	-9489
25	5	14	64	40	27,2	76,00	85	8	-7871	65	6	20	90	56	43,2	197,15	206	8	-9554
26	5	14	67	40	27,2	79,02	88	8	-7947	70	6	20	90	56	43,2	212,30	221	8	-9620
27	5	14	70	40	27,2	82,05	91	8	-8010	76	6	20	90	56	43,2	230,49	239	8	-9695
28	5	14	73	40	27,2	85,07	94	8	-8085	80	6	20	90	56	43,2	242,61	251	8	-9760
29	5	14	76	40	27,2	88,09	97	8	-8150	95	6	20	90	56	43,2	288,08	297	8	-9836
30	5	14	79	40	27,2	91,12	100	8	-8226	114	6	20	90	56	43,2	345,68	354	8	-9901
31	5	16	80	40	27,2	94,15	103	8	-8291										

Kedjetransmissioner

Kedjehjul Standard 08B 1/2"

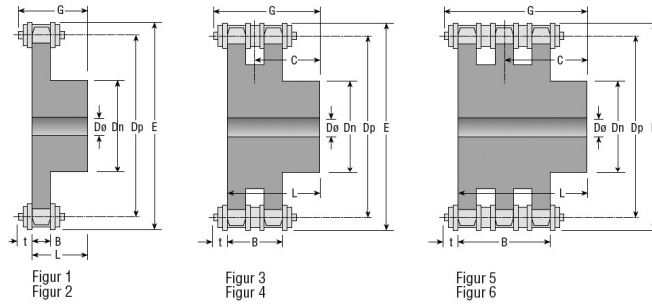


08B 1/2". Max. axelhål = Dn x 0,6 med kilspår SMS 2305.

Simplex B = 7,2							Simplex B = 7,2							Simplex B = 7,2						
Z	Fig.	DØ	Dn	L	C	Best nr 0714	Z	Fig.	DØ	Dn	L	C	Best nr 0714	Z	Fig.	DØ	Dn	L	C	Best nr 0714
8	1	10	18	25	21,4	-0107	24	1	14	70	28	24,4	-1220	40	2	16	88	35	31,4	-2343
9	1	10	22	25	21,4	-0172	25	1	14	70	28	24,4	-1295	42	2	20	88	40	36,4	-2418
10	1	10	26	25	21,4	-0248	26	1	15	70	30	26,4	-1360	45	2	20	88	40	36,4	-2483
11	1	10	29	25	21,4	-0313	27	1	15	70	30	26,4	-1436	46	2	20	88	40	36,4	-2558
12	1	10	33	28	24,4	-0388	28	1	15	70	30	26,4	-1501	48	2	20	88	40	36,4	-2624
13	1	10	37	28	24,4	-0453	29	1	15	80	30	26,4	-1576	50	2	20	88	40	36,4	-2699
14	1	10	41	28	24,4	-0529	30	1	15	80	30	26,4	-1642	54	2	20	88	40	36,4	-2764
15	1	10	45	28	24,4	-0594	31	2	16	88	30	26,4	-1717	57	2	20	88	40	36,4	-2830
16	1	12	50	28	24,4	-0669	32	2	16	88	30	26,4	-1782	60	2	20	88	40	36,4	-2905
17	1	12	52	28	24,4	-0735	33	2	16	88	30	26,4	-1857	65	2	25	88	40	36,4	-2970
18	1	12	56	28	24,4	-0800	34	2	16	88	30	26,4	-1923	70	2	25	88	40	36,4	-3044
19	1	12	60	28	24,4	-0875	35	2	16	88	30	26,4	-1998	76	2	25	88	40	36,4	-3119
20	1	12	64	28	24,4	-0941	36	2	16	88	35	31,4	-2061	80	2	25	88	40	36,4	-3184
21	1	14	68	28	24,4	-1014	37	2	16	88	35	31,4	-2137	95	2	25	88	40	36,4	-3259
22	1	14	70	28	24,4	-1089	38	2	16	88	35	31,4	-2202	114	2	25	88	40	36,4	-3325
23	1	14	70	28	24,4	-1154	39	2	16	88	35	31,4	-2277							


Duplex B = 21,0							Duplex B = 21,0							Duplex B = 21,0						
Z	Fig.	DØ	Dn	L	C	Best nr 0714	Z	Fig.	DØ	Dn	L	C	Best nr 0714	Z	Fig.	DØ	Dn	L	C	Best nr 0714
8	3	10	18	32	21,5	-3390	24	3	16	75	40	29,5	-4513	40	4	20	108	40	29,5	-5635
9	3	10	22	32	21,5	-3465	25	3	16	80	40	29,5	-4588	42	4	20	108	50	39,5	-5700
10	3	10	26	32	21,5	-3531	26	3	20	85	40	29,5	-4653	45	4	20	108	50	39,5	-5775
11	3	12	30	35	24,5	-3606	27	3	20	85	40	29,5	-4729	46	4	20	108	50	39,5	-5841
12	3	12	35	35	24,5	-3671	28	3	20	90	40	29,5	-4794	48	4	20	108	50	39,5	-5916
13	3	12	38	35	24,5	-3747	29	3	20	95	40	29,5	-4869	50	4	20	108	50	39,5	-5981
14	3	12	42	35	24,5	-3812	30	4	20	98	40	29,5	-4935	54	4	25	108	50	39,5	-6054
15	3	12	46	35	24,5	-3887	31	4	20	98	40	29,5	-5007	57	4	25	108	50	39,5	-6120
16	3	16	50	35	24,5	-3952	32	4	20	98	40	29,5	-5072	60	4	25	108	50	39,5	-6195
17	3	16	54	35	24,5	-4026	33	4	20	98	40	29,5	-5148	65	4	25	108	50	39,5	-6260
18	3	16	58	35	24,5	-4091	34	4	20	98	40	29,5	-5213	70	4	25	108	50	39,5	-6336
19	3	16	62	35	24,5	-4166	35	4	20	98	40	29,5	-5288	76	4	25	108	50	39,5	-6401
20	3	16	66	35	24,5	-4232	36	4	20	108	40	29,5	-5353	80	4	25	108	50	39,5	-6476
21	3	16	70	40	29,5	-4307	37	4	20	108	40	29,5	-5429	95	4	25	108	50	39,5	-6542
22	3	16	70	40	29,5	-4372	38	4	20	108	40	29,5	-5494	114	4	25	108	50	39,5	-6617
23	3	16	70	40	29,5	-4448	39	4	20	108	40	29,5	-5569							

Triplex B = 34,9										Triplex B = 34,9									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0714	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0714
8	5	10	18	46	28,55	33,18	45	9	-6682	32	6	20	98	55	37,55	129,56	142	9	-8365
9	5	12	22	46	28,55	37,13	49	9	-6757	33	6	20	98	55	37,55	133,60	146	9	-8431
10	5	12	26	46	28,55	41,10	53	9	-6823	34	6	20	98	55	37,55	137,64	150	9	-8506
11	5	16	30	50	32,55	45,07	57	9	-6898	35	6	20	98	55	37,55	141,68	154	9	-8571
12	5	16	35	50	32,55	49,07	61	9	-6963	36	6	20	118	55	37,55	145,72	158	9	-8647
13	5	16	38	50	32,55	53,06	65	9	-7037	37	6	20	118	55	37,55	149,76	162	9	-8712
14	5	16	42	50	32,55	57,07	69	9	-7102	38	6	20	118	55	37,55	153,80	166	9	-8787
15	5	16	46	50	32,55	61,09	73	9	-7177	39	6	20	118	55	37,55	157,83	170	9	-8852
16	5	16	50	50	32,55	65,10	77	9	-7243	40	6	20	118	55	37,55	161,87	174	9	-8928
17	5	16	54	50	32,55	69,11	81	9	-7318	42	6	25	118	60	42,55	169,95	182	9	-8993
18	5	16	58	50	32,55	73,14	85	9	-7383	45	6	25	118	60	42,55	182,07	194	9	-9066
19	5	16	62	50	32,55	77,16	89	9	-7458	46	6	25	118	60	42,55	186,03	198	9	-9132
20	5	16	66	50	32,55	81,19	94	9	-7524	48	6	25	118	60	42,55	194,18	206	9	-9207
21	5	20	70	55	37,55	85,22	98	9	-7599	50	6	25	118	60	42,55	202,26	215	9	-9272
22	5	20	70	55	37,55	89,24	102	9	-7664	54	6	25	118	60	42,55	218,43	231	9	-9348
23	5	20	70	55	37,55	93,27	106	9	-7730	57	6	25	118	60	42,55	230,54	243	9	-9413
24	5	20	75	55	37,55	97,29	110	9	-7805	60	6	25	118	60	42,55	242,66	255	9	-9488
25	5	20	80	55	37,55	101,33	114	9	-7870	65	6	25	118	60	42,55	262,86	275	9	-9553
26	5	20	85	55	37,55	105,36	118	9	-7946	70	6	25	118	60	42,55	283,07	296	9	-9629
27	5	20	85	55	37,55	109,40	122	9	-8019	76	6	25	118	60	42,55	307,33	320	9	-9694
28	5	20	90	55	37,55	113,42	126	9	-8084	80	6	25	118	60	42,55	323,48	336	9	-9769
29	5	20	95	55	37,55	117,46	130	9	-8159	95	6	25	118	60	42,55	384,11	396	9	-9835
30	6	20	98	55	37,55	121,50	134	9	-8225	114	6	25	118	60	42,55	460,90	473	9	-9900
31	6	20	98	55	37,55	125,54	138	9	-8290										


Kedjehjul Standard 10B 5/8"



Figur 1
Figur 2



Figur 3
Figur 4



Figur 5
Figur 6

10B 5/8". Max. axelhål = Dn x 0.6 med kilspår SMS 2305.

Simplex B = 9,1							Simplex B = 9,1							Simplex B = 9,1						
Z	Fig.	DØ	Dn	L	C	Best nr 0715	Z	Fig.	DØ	Dn	L	C	Best nr 0715	Z	Fig.	DØ	Dn	L	C	Best nr 0715
8	1	10	23	25	20,45	-0106	24	2	12	83	30	25,45	-1229	39	2	20	98	35	30,45	-2276
9	1	10	28	25	20,45	-0171	25	2	16	83	30	25,45	-1294	40	2	20	98	35	30,45	-2342
10	1	10	33	25	20,45	-0247	26	2	16	98	35	30,45	-1369	42	2	20	98	40	30,45	-2417
11	1	12	37	28	23,45	-0312	27	2	16	98	35	30,45	-1435	45	2	20	98	40	35,45	-2482
12	1	12	42	28	23,45	-0387	28	2	16	98	35	30,45	-1500	46	2	20	98	40	35,45	-2557
13	1	12	47	28	23,45	-0452	29	2	16	98	35	30,45	-1575	48	2	20	98	40	35,45	-2623
14	1	12	52	28	23,45	-0528	30	2	16	98	35	30,45	-1641	50	2	20	98	40	35,45	-2698
15	1	12	57	28	23,45	-0593	31	2	16	98	35	30,45	-1716	54	2	20	98	40	35,45	-2763
16	1	14	60	30	25,45	-0668	32	2	16	98	35	30,45	-1781	57	2	25	98	40	35,45	-2839
17	1	14	60	30	25,45	-0734	33	2	16	98	35	30,45	-1856	60	2	25	98	40	35,45	-2904
18	1	14	70	30	25,45	-0809	34	2	16	98	35	30,45	-1922	65	2	25	98	50	40,45	-2979
19	1	14	70	30	25,45	-0874	35	2	16	98	35	30,45	-1997	70	2	25	98	50	40,45	-3043
20	1	14	75	30	25,45	-0940	36	2	20	98	35	30,45	-2060	76	2	25	98	50	40,45	-3118
21	1	16	75	30	25,45	-1013	37	2	20	98	35	30,45	-2136	95	2	30	98	50	40,45	-3183
22	2	12	83	30	25,45	-1088	38	2	20	98	35	30,45	-2201	114	2	30	98	50	40,45	-3258
23	2	12	83	30	25,45	-1153														

Duplex B = 25,5							Duplex B = 25,5							Duplex B = 25,5						
Z	Fig.	DØ	Dn	L	C	Best nr 0715	Z	Fig.	DØ	Dn	L	C	Best nr 0715	Z	Fig.	DØ	Dn	L	C	Best nr 0715
8	3	12	23	40	27,3	-3324	24	4	16	83	45	32,3	-4447	39	4	20	118	45	32,3	-5493
9	3	12	28	40	27,3	-3399	25	4	16	83	45	32,3	-4512	40	4	20	118	45	32,3	-5568
10	3	12	33	40	27,3	-3464	26	4	16	83	45	32,3	-4587	42	4	20	128	50	37,3	-5634
11	3	14	39	40	27,3	-3530	27	4	16	83	45	32,3	-4652	45	4	20	128	50	37,3	-5709
12	3	14	44	40	27,3	-3605	28	4	16	83	45	32,3	-4728	46	4	20	128	50	37,3	-5774
13	3	14	49	40	27,3	-3670	29	4	16	118	45	32,3	-4793	48	4	20	128	50	37,3	-5840
14	3	14	54	40	27,3	-3746	30	4	16	118	45	32,3	-4868	50	4	20	128	50	37,3	-5915
15	3	14	59	40	27,3	-3811	31	4	20	118	45	32,3	-4934	54	4	20	128	50	37,3	-5980
16	3	16	64	45	32,3	-3886	32	4	20	118	45	32,3	-5006	57	4	20	128	50	37,3	-6053
17	3	16	69	45	32,3	-3951	33	4	20	118	45	32,3	-5071	60	4	20	128	50	37,3	-6129
18	3	16	74	45	32,3	-4025	34	4	20	118	45	32,3	-5147	65	4	20	128	63	50,3	-6194
19	3	16	79	45	32,3	-4090	35	4	20	118	45	32,3	-5212	70	4	20	128	63	50,3	-6269
20	4	16	83	45	32,3	-4165	36	4	20	118	45	32,3	-5287	76	4	20	128	63	50,3	-6335
21	4	16	83	45	32,3	-4231	37	4	20	118	45	32,3	-5352	95	4	30	128	63	50,3	-6400
22	4	16	83	45	32,3	-4306	38	4	20	118	45	32,3	-5428	114	4	30	128	63	50,3	-6475
23	4	16	83	45	32,3	-4371														


Triplex B = 42,1										Triplex B = 42,1									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0715	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0715
8	5	12	23	55	33,95	41,48	57	10	-6541	31	6	20	118	60	38,95	156,92	172	10	-8158
9	5	12	28	55	33,95	46,42	62	10	-6616	32	6	20	118	60	38,95	161,95	177	10	-8224
10	5	16	33	55	33,95	51,37	67	10	-6681	33	6	20	118	60	38,95	167,00	182	10	-8299
11	5	16	39	55	33,95	56,34	72	10	-6756	34	6	20	118	60	38,95	172,05	187	10	-8364
12	5	16	44	55	33,95	61,34	77	10	-6822	35	6	20	118	60	38,95	177,10	192	10	-8430
13	5	16	49	55	33,95	66,32	82	10	-6897	36	6	25	118	60	38,95	182,15	197	10	-8505
14	5	16	54	55	33,95	71,34	87	10	-6962	37	6	25	118	60	38,95	187,20	202	10	-8570
15	5	16	59	55	33,95	76,36	92	10	-7036	38	6	25	118	60	38,95	192,24	207	10	-8646
16	5	16	64	60	38,95	81,37	97	10	-7101	39	6	25	118	60	38,95	197,29	213	10	-8711
17	5	16	69	60	38,95	86,39	102	10	-7176	40	6	25	118	60	38,95	202,34	218	10	-8786
18	5	16	74	60	38,95	91,42	107	10	-7242	42	6	25	118	60	38,95	212,44	228	10	-8851
19	5	16	79	60	38,95	96,45	112	10	-7317	45	6	25	128	60	38,95	227,58	243	10	-8927
20	6	16	83	60	38,95	101,49	117	10	-7382	46	6	25	128	60	38,95	232,63	248	10	-8992
21	6	16	83	60	38,95	106,52	122	10	-7457	48	6	25	128	60	38,95	242,73	258	10	-9065
22	6	16	83	60	38,95	111,55	127	10	-7523	50	6	25	128	60	38,95	252,82	268	10	-9131
23	6	16	83	60	38,95	116,58	132	10	-7598	54	6	25	128	60	38,95	273,03	288	10	-9206
24	6	16	83	60	38,95	121,62	137	10	-7663	57	6	25	128	60	38,95	288,18	303	10	-9271
25	6	16	83	60	38,95	126,66	142	10	-7739	60	6	25	128	60	38,95	303,22	319	10	-9347
26	6	20	83	60	38,95	131,70	147	10	-7804	65	6	25	128	60	38,95	328,58	344	10	-9412
27	6	20	83	60	38,95	136,75	152	10	-7879	70	6	30	128	67	45,95	353,84	369	10	-9487
28	6	20	83	60	38,95	141,78	157	10	-7945	76	6	30	128	67	45,95	384,16	399	10	-9552
29	6	20	118	60	38,95	146,83	162	10	-8018	95	6	30	128	67	45,95	480,14	495	10	-9628
30	6	20	118	60	38,95	151,87	167	10	-8083	114	6	30	128	67	45,95	576,13	591	10	-9693

Kedjetransmissioner


Kedjehjul

Standard


12B 3/4"



Figur 1
Figur 2



Figur 3
Figur 4



Figur 5
Figur 6


12B 3/4". Max. axelhål = Dn x 0,6 med kilspår SMS 2305.

Simplex B = 11,1							Simplex B = 11,1							Simplex B = 11,1						
Z	Fig.	DØ	Dn	L	C	Best nr 0716	Z	Fig.	DØ	Dn	L	C	Best nr 0716	Z	Fig.	DØ	Dn	L	C	Best nr 0716
8	1	12	29	30	24,45	-0105	24	2	16	93	40	34,45	-1228	39	2	20	98	40	34,45	-2275
9	1	12	35	30	24,45	-0170	25	2	16	93	40	34,45	-1293	40	2	20	98	40	34,45	-2341
10	1	12	42	30	24,45	-0246	26	2	16	93	40	34,45	-1368	42	2	25	108	56	50,45	-2416
11	1	14	46	35	29,45	-0311	27	2	16	93	40	34,45	-1434	45	2	25	108	56	50,45	-2481
12	1	14	52	35	29,45	-0386	28	2	16	93	40	34,45	-1509	46	2	25	108	56	50,45	-2556
13	1	14	58	35	29,45	-0451	29	2	16	98	40	34,45	-1574	48	2	25	108	56	50,45	-2622
14	1	14	64	35	29,45	-0527	30	2	16	98	40	34,45	-1640	50	2	25	108	56	50,45	-2697
15	1	14	70	35	29,45	-0592	31	2	20	98	40	34,45	-1715	54	2	25	108	56	50,45	-2762
16	1	16	75	35	29,45	-0667	32	2	20	98	40	34,45	-1780	57	2	25	108	56	50,45	-2838
17	1	16	80	35	29,45	-0733	33	2	20	98	40	34,45	-1855	60	2	25	108	56	50,45	-2903
18	1	16	80	35	29,45	-0808	34	2	20	98	40	34,45	-1921	65	2	25	108	56	50,45	-2978
19	1	16	80	35	29,45	-0873	35	2	20	98	40	34,45	-1996	70	2	30	108	56	50,45	-3042
20	1	16	80	35	29,45	-0949	36	2	20	98	40	34,45	-2069	76	2	30	108	56	50,45	-3117
21	2	16	93	40	34,45	-1012	37	2	20	98	40	34,45	-2135	95	2	30	108	56	50,45	-3182
22	2	16	93	40	34,45	-1087	38	2	20	98	40	34,45	-2200	114	2	30	108	56	50,45	-3257
23	2	16	93	40	34,45	-1152														

Duplex B = 30,3							Duplex B = 30,3							Duplex B = 30,3						
Z	Fig.	DØ	Dn	L	C	Best nr 0716	Z	Fig.	DØ	Dn	L	C	Best nr 0716	Z	Fig.	DØ	Dn	L	C	Best nr 0716
8	3	12	29	45	29,85	-3323	24	4	16	98	50	34,85	-4446	39	4	25	128	50	34,85	-5492
9	3	12	35	45	29,85	-3398	25	4	16	98	50	34,85	-4511	40	4	25	128	50	34,85	-5567
10	3	12	42	45	29,85	-3463	26	4	20	128	50	34,85	-4586	42	4	25	138	63	47,85	-5633
11	3	16	47	50	34,85	-3539	27	4	20	128	50	34,85	-4651	45	4	25	138	63	47,85	-5708
12	3	16	53	50	34,85	-3604	28	4	20	128	50	34,85	-4727	46	4	25	138	63	47,85	-5773
13	3	16	59	50	34,85	-3679	29	4	20	128	50	34,85	-4792	48	4	25	138	63	47,85	-5849
14	3	16	65	50	34,85	-3745	30	4	20	128	50	34,85	-4867	50	4	25	138	63	47,85	-5914
15	3	16	71	50	34,85	-3810	31	4	20	128	50	34,85	-4933	54	4	25	138	63	47,85	-5989
16	3	20	77	50	34,85	-3885	32	4	20	128	50	34,85	-5005	57	4	25	138	63	47,85	-6052
17	3	20	83	50	34,85	-3950	33	4	20	128	50	34,85	-5070	60	4	25	138	63	47,85	-6128
18	3	20	89	50	34,85	-4024	34	4	20	128	50	34,85	-5146	65	4	30	138	63	47,85	-6193
19	3	20	95	50	34,85	-4099	35	4	20	128	50	34,85	-5211	70	4	30	138	63	47,85	-6268
20	3	16	98	50	34,85	-4164	36	4	25	128	50	34,85	-5286	76	4	30	138	63	47,85	-6334
21	4	16	98	50	34,85	-4230	37	4	25	128	50	34,85	-5351	95	4	30	138	63	47,85	-6409
22	4	16	98	50	34,85	-4305	38	4	25	128	50	34,85	-5427	114	4	30	138	63	47,85	-6474
23	4	16	98	50	34,85	-4370														

Triplex B = 49,8										Triplex B = 49,8									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0716	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0716
8	5	16	29	65	40,1	49,78	66	11	-6540	31	6	25	128	70	45,1	188,31	205	11	-8157
9	5	16	35	65	40,1	55,70	72	11	-6615	32	6	25	128	70	45,1	194,35	211	11	-8223
10	5	16	42	65	40,1	61,64	78	11	-6680	33	6	25	128	70	45,1	200,40	217	11	-8298
11	5	20	47	70	45,1	67,61	84	11	-6755	34	6	25	128	70	45,1	206,46	223	11	-8363
12	5	20	53	70	45,1	73,61	90	11	-6821	35	6	25	128	70	45,1	212,52	229	11	-8439
13	5	20	59	70	45,1	79,59	96	11	-6896	36	6	25	128	70	45,1	218,58	235	11	-8504
14	5	20	65	70	45,1	85,61	102	11	-6961	37	6	25	128	70	45,1	224,64	241	11	-8579
15	5	20	71	70	45,1	91,63	108	11	-7035	38	6	25	128	70	45,1	230,69	247	11	-8645
16	5	20	77	70	45,1	97,65	114	11	-7100	39	6	25	128	70	45,1	236,75	253	11	-8710
17	5	20	83	70	45,1	103,67	120	11	-7175	40	6	25	128	70	45,1	242,81	259	11	-8785
18	5	20	89	70	45,1	109,71	126	11	-7241	42	6	25	138	70	45,1	254,93	273	11	-8850
19	5	20	95	70	45,1	115,75	132	11	-7316	45	6	25	138	70	45,1	273,10	290	11	-8926
20	5	20	98	70	45,1	121,78	138	11	-7381	46	6	25	138	70	45,1	279,16	296	11	-8991
21	6	20	98	70	45,1	127,82	144	11	-7456	48	6	25	138	70	45,1	291,27	308	11	-9064
22	6	20	98	70	45,1	133,86	151	11	-7522	50	6	25	138	70	45,1	303,39	320	11	-9130
23	6	20	98	70	45,1	139,90	157	11	-7597	54	6	25	138	70	45,1	327,64	344	11	-9205
24	6	20	98	70	45,1	145,94	163	11	-7662	57	6	30	138	70	45,1	345,81	362	11	-9270
25	6	20	98	70	45,1	152,00	169	11	-7738	60	6	30	138	70	45,1	363,99	380	11	-9346
26	6	20	128	70	45,1	158,04	175	11	-7803	65	6	30	138	70	45,1	394,29	411	11	-9411
27	6	20	128	70	45,1	164,09	181	11	-7878	70	6	30	138	70	45,1	424,60	442	11	-9486
28	6	20	128	70	45,1	170,13	187	11	-7944	76	6	30	138	70	45,1	460,99	478	11	-9551
29	6	20	128	70	45,1	176,19	193	11	-8017	95	6	30	138	70	45,1	576,17	593	11	-9627
30	6	20	128	70	45,1	182,25	199	11	-8082	114	6	30	138	70	45,1	691,36	708	11	-9692

Kedjehjul Standard 16B 1"

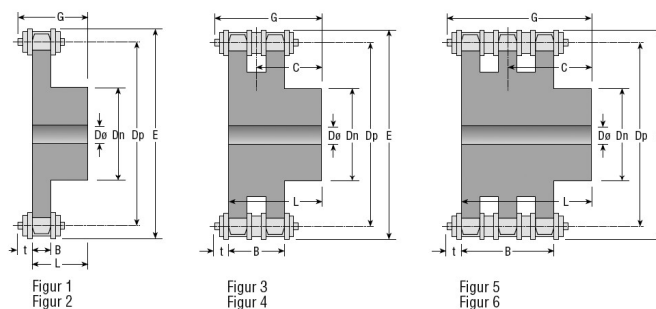

16B 1". Max. axelhål = Dn x 0,6 med kilspår SMS 2305.

Simplex B = 16,2							Simplex B = 16,2							Simplex B = 16,2						
Z	Fig.	Dø	Dn	L	C	Best nr 0717	Z	Fig.	Dø	Dn	L	C	Best nr 0717	Z	Fig.	Dø	Dn	L	C	Best nr 0717
8	1	16	42	35	26,9	-0104	24	2	20	125	50	41,9	-1227	39	2	25	125	50	41,9	-2274
9	1	16	50	35	26,9	-0179	25	2	20	125	50	41,9	-1292	40	2	25	125	50	41,9	-2340
10	1	16	55	35	26,9	-0245	26	2	20	125	50	41,9	-1367	42	2	25	125	70	61,9	-2415
11	1	16	61	40	31,9	-0310	27	2	20	125	50	41,9	-1433	45	2	25	125	70	61,9	-2480
12	1	16	69	40	31,9	-0385	28	2	20	125	50	41,9	-1508	46	2	25	125	70	61,9	-2555
13	1	16	78	40	31,9	-0450	29	2	20	125	50	41,9	-1573	48	2	25	125	70	61,9	-2621
14	1	16	84	40	31,9	-0526	30	2	20	125	50	41,9	-1649	50	2	25	125	70	61,9	-2696
15	1	16	92	40	31,9	-0591	31	2	25	125	50	41,9	-1714	54	2	30	125	70	61,9	-2761
16	1	20	100	45	36,9	-0666	32	2	25	125	50	41,9	-1789	57	2	30	125	70	61,9	-2837
17	1	20	100	45	36,9	-0732	33	2	25	125	50	41,9	-1854	60	2	30	138	80	71,9	-2902
18	1	20	100	45	36,9	-0807	34	2	25	125	50	41,9	-1920	65	2	30	138	80	71,9	-2977
19	1	20	100	45	36,9	-0872	35	2	25	125	50	41,9	-1995	70	2	30	138	80	71,9	-3041
20	1	20	125	45	36,9	-0948	36	2	25	125	50	41,9	-2068	76	2	30	138	80	71,9	-3116
21	2	20	125	50	41,9	-1011	37	2	25	125	50	41,9	-2134	95	2	30	138	80	71,9	-3181
22	2	20	125	50	41,9	-1086	38	2	25	125	50	41,9	-2209	114	2	30	138	80	71,9	-3256
23	2	20	125	50	41,9	-1151														

Duplex B = 47,7							Duplex B = 47,7							Duplex B = 47,7						
Z	Fig.	Dø	Dn	L	C	Best nr 0717	Z	Fig.	Dø	Dn	L	C	Best nr 0717	Z	Fig.	Dø	Dn	L	C	Best nr 0717
8	3	16	42	65	41,15	-3322	24	4	25	138	70	46,15	-4445	39	4	25	138	70	46,15	-5491
9	3	16	50	65	41,15	-3397	25	4	25	138	70	46,15	-4510	40	4	25	138	70	46,15	-5566
10	3	16	56	65	41,15	-3462	26	4	25	138	70	46,15	-4585	42	4	25	148	80	56,15	-5632
11	3	20	64	70	46,15	-3538	27	4	25	138	70	46,15	-4650	45	4	25	148	80	56,15	-5707
12	3	20	72	70	46,15	-3603	28	4	25	138	70	46,15	-4726	46	4	30	148	80	56,15	-5772
13	3	20	80	70	46,15	-3678	29	4	25	138	70	46,15	-4791	48	4	30	148	80	56,15	-5848
14	3	20	88	70	46,15	-3744	30	4	25	138	70	46,15	-4866	50	4	30	148	80	56,15	-5913
15	3	20	96	70	46,15	-3819	31	4	25	138	70	46,15	-4932	54	4	30	158	90	66,15	-5988
16	3	20	104	70	46,15	-3884	32	4	25	138	70	46,15	-5004	57	4	30	158	90	66,15	-6051
17	3	20	112	70	46,15	-3959	33	4	25	138	70	46,15	-5079	60	4	30	158	90	66,15	-6127
18	3	20	120	70	46,15	-4023	34	4	25	138	70	46,15	-5145	65	4	30	158	90	66,15	-6192
19	3	20	128	70	46,15	-4098	35	4	25	138	70	46,15	-5210	70	4	30	158	90	66,15	-6267
20	3	25	130	70	46,15	-4163	36	4	25	138	70	46,15	-5285	76	4	30	158	90	66,15	-6333
21	4	25	138	70	46,15	-4239	37	4	25	138	70	46,15	-5350	95	4	30	158	90	66,15	-6408
22	4	25	138	70	46,15	-4304	38	4	25	138	70	46,15	-5426	114	4	40	158	90	66,15	-6473
23	4	25	138	70	46,15	-4379														


Triplex B = 79,6										Triplex B = 79,6									
Z	Fig.	Dø	Dn	L	C	Dp	E	t	Best nr 0717	Z	Fig.	Dø	Dn	L	C	Dp	E	t	Best nr 0717
8	5	20	42	95	55,2	66,37	88	17	-6549	31	6	30	138	100	60,2	251,08	273	17	-8156
9	5	20	50	95	55,2	74,27	96	17	-6614	32	6	30	138	100	60,2	259,13	281	17	-8222
10	5	20	56	95	55,2	82,19	104	17	-6689	33	6	30	138	100	60,2	267,21	289	17	-8297
11	5	25	64	100	60,2	90,14	112	17	-6754	34	6	30	138	100	60,2	275,28	297	17	-8362
12	5	25	72	100	60,2	98,14	120	17	-6820	35	6	30	138	100	60,2	283,36	305	17	-8438
13	5	25	80	100	60,2	106,12	128	17	-6895	36	6	30	138	100	60,2	291,44	313	17	-8503
14	5	25	88	100	60,2	114,15	136	17	-6960	37	6	30	138	100	60,2	299,51	321	17	-8578
15	5	25	96	100	60,2	122,17	144	17	-7034	38	6	30	138	100	60,2	307,59	329	17	-8644
16	5	30	104	100	60,2	130,20	152	17	-7109	39	6	30	138	100	60,2	315,67	337	17	-8719
17	5	30	112	100	60,2	138,22	160	17	-7174	40	6	30	138	100	60,2	323,75	345	17	-8784
18	5	30	120	100	60,2	146,28	168	17	-7240	42	6	30	158	100	60,2	339,90	361	17	-8859
19	5	30	128	100	60,2	154,33	176	17	-7315	45	6	30	158	100	60,2	364,13	386	17	-8925
20	5	30	130	100	60,2	162,38	184	17	-7380	46	6	30	158	100	60,2	372,21	394	17	-8990
21	6	30	138	100	60,2	170,43	192	17	-7455	48	6	30	158	100	60,2	388,36	410	17	-9063
22	6	30	138	100	60,2	178,48	200	17	-7521	50	6	30	158	100	60,2	404,52	426	17	-9139
23	6	30	138	100	60,2	186,53	208	17	-7596	54	6	40	178	110	70,2	436,85	459	17	-9204
24	6	30	138	100	60,2	194,59	216	17	-7661	57	6	40	178	110	70,2	461,07	483	17	-9279
25	6	30	138	100	60,2	202,66	224	17	-7737	60	6	40	178	110	70,2	485,32	507	17	-9345
26	6	30	138	100	60,2	210,72	232	17	-7802	65	6	40	178	110	70,2	525,73	548	17	-9410
27	6	30	138	100	60,2	218,79	240	17	-7877	70	6	40	178	110	70,2	566,14	588	17	-9485
28	6	30	138	100	60,2	226,85	248	17	-7943	76	6	40	178	110	70,2	614,65	636	17	-9550
29	6	30	138	100	60,2	234,92	257	17	-8016	95	6	40	178	110	70,2	768,22	790	17	-9626
30	6	30	138	100	60,2	243,00	265	17	-8081	114	7	40	178	110	70,2	921,81	944	17	-9691

Kedjetransmissioner


Kedjehjul

Standard


20B 1 1/4"



Figur 1
Figur 2



Figur 3
Figur 4



Figur 5
Figur 6


20B 1 1/4". Max. axelhål = Dn x 0.6 med kilspår SMS 2305.

Simplex B = 18,5							Simplex B = 18,5							Simplex B = 18,5						
Z	Fig.	DØ	Dn	L	C	Best nr 0718	Z	Fig.	DØ	Dn	L	C	Best nr 0718	Z	Fig.	DØ	Dn	L	C	Best nr 0718
8	1	20	53	40	30,75	-0103	24	2	25	158	55	45,75	-1226	39	2	25	158	55	45,75	-2273
9	1	20	63	40	30,75	-0178	25	2	25	158	55	45,75	-1291	40	2	25	158	55	45,75	-2349
10	1	20	70	40	30,75	-0244	26	2	25	158	55	45,75	-1366	42	2	30	158	70	60,75	-2414
11	1	20	77	45	35,75	-0319	27	2	25	158	55	45,75	-1432	45	2	30	158	70	60,75	-2489
12	1	20	88	45	35,75	-0384	28	2	25	158	55	45,75	-1507	46	2	30	158	70	60,75	-2554
13	1	20	98	45	35,75	-0459	29	2	25	158	55	45,75	-1572	48	2	30	158	70	60,75	-2620
14	1	20	108	45	35,75	-0525	30	2	25	158	55	45,75	-1648	50	2	30	158	70	60,75	-2695
15	1	20	118	45	35,75	-0590	31	2	25	158	55	45,75	-1713	54	2	30	158	70	60,75	-2760
16	2	25	118	50	40,75	-0665	32	2	25	158	55	45,75	-1788	57	2	30	158	80	70,75	-2836
17	2	25	118	50	40,75	-0731	33	2	25	158	55	45,75	-1853	60	2	30	158	80	70,75	-2901
18	2	25	118	50	40,75	-0806	34	2	25	158	55	45,75	-1929	65	2	30	158	80	70,75	-2976
19	2	25	118	50	40,75	-0871	35	2	25	158	55	45,75	-1994	70	2	30	158	80	70,75	-3040
20	2	25	118	50	40,75	-0947	36	2	25	158	55	45,75	-2067	76	2	30	158	90	80,75	-3115
21	2	25	158	55	45,75	-1010	37	2	25	158	55	45,75	-2133	95	2	30	158	90	80,75	-3180
22	2	25	158	55	45,75	-1085	38	2	25	158	55	45,75	-2208	114	2	40	158	90	80,75	-3255
23	2	25	158	55	45,75	-1150														

Duplex B = 47,7							Duplex B = 47,7							Duplex B = 47,7						
Z	Fig.	DØ	Dn	L	C	Best nr 0718	Z	Fig.	DØ	Dn	L	C	Best nr 0718	Z	Fig.	DØ	Dn	L	C	Best nr 0718
8	3	20	53	75	47,7	-3321	24	4	25	158	80	52,7	-4444	39	4	30	158	80	52,7	-5490
9	3	20	63	75	47,7	-3396	25	4	25	158	80	52,7	-4519	40	4	30	158	80	52,7	-5565
10	3	20	70	75	47,7	-3461	26	4	25	158	80	52,7	-4584	42	4	30	168	90	62,7	-5631
11	3	20	80	80	52,7	-3537	27	4	25	158	80	52,7	-4659	45	4	30	168	90	62,7	-5706
12	3	20	90	80	52,7	-3602	28	4	25	158	80	52,7	-4725	46	4	30	168	90	62,7	-5771
13	3	20	100	80	52,7	-3677	29	4	25	158	80	52,7	-4790	48	4	30	168	90	62,7	-5847
14	3	20	110	80v	52,7	-3743	30	4	25	158	80	52,7	-4865	50	4	30	168	90	62,7	-5912
15	3	20	120	80	52,7	-3818	31	4	25	158	80	52,7	-4931	54	4	30	168	90	62,7	-5987
16	4	25	118	80	52,7	-3883	32	4	25	158	80	52,7	-5003	57	4	30	168	100	72,7	-6050
17	4	25	118	80	52,7	-3958	33	4	25	158	80	52,7	-5078	60	4	30	168	100	72,7	-6126
18	4	25	118	80	52,7	-4022	34	4	25	158	80	52,7	-5144	65	4	30	168	100	72,7	-6191
19	4	25	118	80	52,7	-4097	35	4	25	158	80	52,7	-5219	70	4	30	168	100	72,7	-6266
20	4	25	118	80	52,7	-4162	36	4	25	158	80	52,7	-5284	76	4	30	168	100	72,7	-6332
21	4	25	158	80	52,7	-4238	37	4	30	158	80	52,7	-5359	95	4	30	168	100	72,7	-6407
22	4	25	158	80	52,7	-4303	38	4	30	158	80	52,7	-5425	114	4	40	168	100	72,7	-6472
23	4	25	158	80	52,7	-4378														

Triplex B = 91,0										Triplex B = 91,0									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0718	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0718
8	5	20	53	110	64,5	82,96	110	20	-6548	31	6	30	158	115	69,5	313,85	341	20	-8155
9	5	20	63	110	64,5	92,84	120	20	-6613	32	6	30	158	115	69,5	323,91	351	20	-8221
10	5	20	70	110	64,5	102,74	130	20	-6688	33	6	30	158	115	69,5	334,01	361	20	-8296
11	5	20	80	110	69,5	112,68	140	20	-6753	34	6	30	158	115	69,5	344,10	371	20	-8361
12	5	20	90	115	69,5	122,68	150	20	-6829	35	6	30	158	115	69,5	354,20	381	20	-8437
13	5	20	100	115	69,5	132,65	160	20	-6894	36	6	30	158	115	69,5	364,30	391	20	-8502
14	5	20	110	115	69,5	142,68	170	20	-6969	37	6	30	158	115	69,5	374,39	401	20	-8577
15	5	20	120	115	69,5	152,72	180	20	-7033	38	6	30	158	115	69,5	384,49	411	20	-8643
16	6	25	118	115	69,5	162,75	190	20	-7108	39	6	30	158	115	69,5	394,59	421	20	-8718
17	6	25	118	115	69,5	172,75	200	20	-7173	40	6	30	158	115	69,5	404,69	432	20	-8783
18	6	25	118	115	69,5	182,85	210	20	-7249	42	6	40	178	115	69,5	428,88	452	20	-8858
19	6	25	118	115	69,5	192,91	220	20	-7314	45	6	40	178	115	69,5	455,17	482	20	-8924
20	6	25	118	115	69,5	202,98	230	20	-7389	46	6	40	178	115	69,5	465,26	492	20	-8999
21	6	25	158	115	69,5	213,04	240	20	-7454	48	6	40	178	115	69,5	485,46	513	20	-9062
22	6	25	158	115	69,5	223,17	250	20	-7520	50	6	40	178	115	69,5	505,65	533	20	-9138
23	6	25	158	115	69,5	233,17	260	20	-7595	54	6	40	178	115	69,5	546,07	573	20	-9203
24	6	25	158	115	69,5	243,23	270	20	-7660	57	6	40	178	125	79,5	576,36	603	20	-9278
25	6	25	158	115	69,5	253,22	280	20	-7736	60	6	40	178	125	79,5	606,65	634	20	-9344
26	6	25	158	115	69,5	263,40	290	20	-7801	65	6	40	178	125	79,5	657,16	684	20	-9419
27	6	25	158	115	69,5	273,49	300	20	-7876	70	6	40	178	125	79,5	707,67	735	20	-9484
28	6	25	158	115	69,5	283,56	311	20	-7942	76	6	40	198	140	94,5	768,32	795	20	-9559
29	6	25	158	115	69,5	293,65	321	20	-8015	95	6	40	198	140	94,5	960,28	988	20	-9625
30	6	25	158	115	69,5	303,75	331	20	-8080	114	6	40	198	140	94,5	1152,26	1180	20	-9690

Kedjehjul Standard 24B 1 1/2"

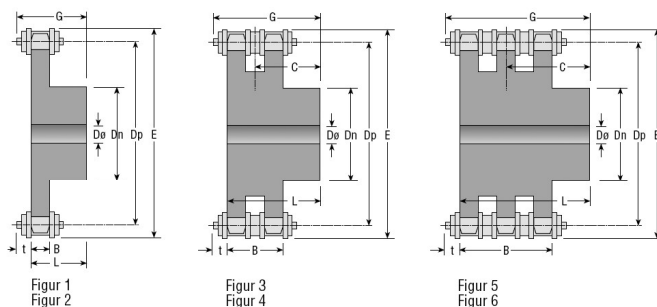

24B/1 1/2". Max. axelhål = Dn x 0,6 med kilspår SMS 2305.

Simplex B = 24,1							Simplex B = 24,1							Simplex B = 24,1						
Z	Fig.	DØ	Dn	L	C	Best nr 0719	Z	Fig.	DØ	Dn	L	C	Best nr 0719	Z	Fig.	DØ	Dn	L	C	Best nr 0719
8	1	20	58	45	32,95	-0102	23	2	25	158	60	47,95	-1159	38	2	30	158	60	47,95	-2207
9	1	20	70	45	32,95	-0177	24	2	25	158	60	47,95	-1225	39	2	30	158	60	47,95	-2272
10	1	20	80	45	32,95	-0243	25	2	25	158	60	47,95	-1290	40	2	30	158	60	47,95	-2348
11	1	25	90	50	37,95	-0318	26	2	30	158	60	47,95	-1365	42	2	30	158	90	77,95	-2413
12	1	25	102	50	37,95	-0383	27	2	30	158	60	47,95	-1431	45	2	30	158	90	77,95	-2488
13	1	25	115	50	37,95	-0458	28	2	30	158	60	47,95	-1506	46	2	30	158	90	77,95	-2553
14	2	20	115	50	37,95	-0524	29	2	30	158	60	47,95	-1571	48	2	30	158	90	77,95	-2629
15	2	20	115	50	37,95	-0599	30	2	30	158	60	47,95	-1647	50	2	30	158	90	77,95	-2694
16	2	25	134	55	42,95	-0664	31	2	30	158	60	47,95	-1712	54	2	30	168	100	87,95	-2769
17	2	25	134	55	42,95	-0730	32	2	30	158	60	47,95	-1787	57	2	30	168	100	87,95	-2835
18	2	25	134	55	42,95	-0805	33	2	30	158	60	47,95	-1852	60	2	30	168	100	87,95	-2900
19	2	25	134	55	42,95	-0870	34	2	30	158	60	47,95	-1928	65	2	40	168	100	87,95	-2975
20	2	25	134	55	42,95	-0946	35	2	30	158	60	47,95	-1993	70	2	40	168	100	87,95	-3049
21	2	25	158	60	47,95	-1019	36	2	30	158	60	47,95	-2066	76	2	40	168	100	87,95	-3114
22	2	25	158	60	47,95	-1084	37	2	30	158	60	47,95	-2132	95	2	40	168	100	87,95	-3189

Duplex B = 72,0							Duplex B = 72,0							Duplex B = 72,0						
Z	Fig.	DØ	Dn	L	C	<i>Best nr 0719</i>	Z	Fig.	DØ	Dn	L	C	<i>Best nr 0719</i>	Z	Fig.	DØ	Dn	L	C	<i>Best nr 0719</i>
8	3	25	58	95	59	-3254	23	4	25	158	100	64	-4302	38	4	30	178	100	64	-5358
9	3	25	70	95	59	-3320	24	4	25	158	100	64	-4377	39	4	30	178	100	64	-5424
10	3	25	80	95	59	-3395	25	4	25	158	100	64	-4443	40	4	30	178	100	64	-5499
11	3	25	90	100	64	-3460	26	4	30	158	100	64	-4518	42	4	40	178	100	64	-5564
12	3	25	102	100	64	-3536	27	4	30	158	100	64	-4583	45	4	40	178	100	64	-5630
13	3	25	115	100	64	-3601	28	4	30	158	100	64	-4658	46	4	40	178	100	64	-5705
14	4	25	115	100	64	-3676	29	4	30	158	100	64	-4724	48	4	40	178	100	64	-5770
15	4	25	115	100	64	-3742	30	4	30	158	100	64	-4799	50	4	40	178	100	64	-5846
16	4	25	115	100	64	-3817	31	4	30	178	100	64	-4864	54	4	40	198	110	74	-5911
17	4	25	115	100	64	-3882	32	4	30	178	100	64	-4930	57	4	40	198	110	74	-5986
18	4	25	158	100	64	-3957	33	4	30	178	100	64	-5002	60	4	40	198	110	74	-6059
19	4	25	158	100	64	-4021	34	4	30	178	100	64	-5077	65	4	40	198	110	74	-6125
20	4	25	158	100	64	-4096	35	4	30	178	100	64	-5143	70	4	40	198	110	74	-6190
21	4	25	158	100	64	-4161	36	4	30	178	100	64	-5218	76	4	40	218	120	84	-6265
22	4	25	158	100	64	-4237	37	4	30	178	100	64	-5283	95	4	40	218	120	84	-6331

Triplex B = 120,3										Triplex B = 120,3									
Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0719	Z	Fig.	DØ	Dn	L	C	Dp	E	t	Best nr 0719
8	5	25	58	140	79,85	99,55	136	79,85	-6406	31	6	30	178	150	89,85	376,62	412	89,85	-8014
9	5	25	70	140	79,85	111,40	148	79,85	-6471	32	6	30	178	150	89,85	388,69	424	89,85	-8089
10	5	25	80	140	79,85	123,29	160	79,85	-6547	33	6	30	178	150	89,85	400,81	436	89,85	-8154
11	5	25	90	150	89,85	135,21	172	89,85	-6612	34	6	30	178	150	89,85	412,93	448	89,85	-8220
12	5	25	102	150	89,85	147,22	184	89,85	-6687	35	6	30	178	150	89,85	425,04	460	89,85	-8295
13	5	25	115	150	89,85	159,18	196	89,85	-6752	36	6	30	178	150	89,85	437,16	472	89,85	-8360
14	6	25	115	150	89,85	171,22	208	89,85	-6828	37	6	30	178	150	89,85	449,27	484	89,85	-8436
15	6	25	115	150	89,85	183,26	220	89,85	-6893	38	6	30	178	150	89,85	461,39	496	89,85	-8501
16	6	25	115	150	89,85	195,30	232	89,85	-6968	39	6	30	178	150	89,85	473,50	508	89,85	-8576
17	6	25	158	150	89,85	207,34	244	89,85	-7032	40	6	30	178	150	89,85	485,62	520	89,85	-8642
18	6	25	158	150	89,85	219,42	256	89,85	-7107	42	6	40	198	150	89,85	509,85	544	89,85	-8717
19	6	25	158	150	89,85	231,49	268	89,85	-7172	45	6	40	198	150	89,85	546,20	580	89,85	-8782
20	6	25	158	150	89,85	243,57	280	89,85	-7248	46	6	40	198	150	89,85	558,32	592	89,85	-8857
21	6	30	158	150	89,85	255,65	292	89,85	-7313	48	6	40	198	150	89,85	582,55	616	89,85	-8923
22	6	30	158	150	89,85	267,73	304	89,85	-7388	50	6	40	198	150	89,85	606,78	640	89,85	-8998
23	6	30	158	150	89,85	279,80	316	89,85	-7453	54	6	40	198	150	89,85	655,28	688	89,85	-9061
24	6	30	158	150	89,85	291,88	328	89,85	-7529	57	6	40	198	150	89,85	691,63	724	89,85	-9137
25	6	30	158	150	89,85	304,00	340	89,85	-7594	60	6	40	198	150	89,85	727,97	760	89,85	-9202
26	6	30	158	150	89,85	316,08	352	89,85	-7669	65	6	40	198	150	89,85	788,59	820	89,85	-9277
27	6	30	158	150	89,85	328,19	364	89,85	-7735	70	6	40	198	150	89,85	849,21	880	89,85	-9343
28	6	30	158	150	89,85	340,27	376	89,85	-7800	76	6	40	248	150	89,85	921,98	956	89,85	-9418
29	6	30	158	150	89,85	352,38	388	89,85	-7875	95	6	40	248	150	89,85	1152,33	1184	89,85	-9483
30	6	30	158	150	89,85	364,50	400	89,85	-7941										